

# Matrix MXC-2000 Series

Intel® Atom™ Fanless Configurable Controller with PCI/PCIe Slots



## Introduction

ADLINK's MXC-2000 series is an exceptionally rugged controller with configurable PCI and PCIe slots. It is designed to provide a reliable platform for a wide variety of applications by accepting standard PCI and PCIe cards. The Matrix MXC-2000 series can operate in a -20 to 70°C temperature range and withstands 5 Grms vibration. Its fanless and cable-less structure provides additional durability for long-term usage.

The Matrix MXC-2000 series features the Intel® Atom™ N270 1.6 GHz processor to deliver adequate performance at low power. Its PCI and PCIe slots enable the possibility of integrating off-the-shelf PCI/PCIe cards for a configurable application platform. Generic I/O interfaces, such as Gigabit Ethernet, COM, and USB are provided for connecting devices, while VGA+S-Video dual graphic outputs to allow connections to larger displays such as an LCD TV. The Matrix MXC-2000 series also integrates ADLINK in-house DIO design to deliver optional isolated DIO channels for industrial control usage.


ADLINK's Matrix MXC-2000 series is the perfect combination of configurability, reliability, durability, and compactness. With the MXC-2000 series, creating your rugged application system has never been easier.

## Features

- Intel® Atom™ N270 1.6 GHz processor + 945GSE chipset
- Configurable, providing both PCI and PCIe slot options
- Rugged, -20°C to 70°C fanless operation
- Built-in 9 VDC to 32 VDC wide-range DC power input
- Dual 1000/100/10 Mbps Ethernet ports
- Two RS-232 ports and two RS-232/422/485 ports
- Two CF sockets for HDD replacement and hot-swappable data storage
- VGA + S-Video independent dual display outputs
- Optional on-board 16-CH isolated DI and 16-CH isolated DO

## Applications

- Industrial Automation
- Factory control
- Test Instrumentation
- Security surveillance
- Data Acquisition System
- Building Automation

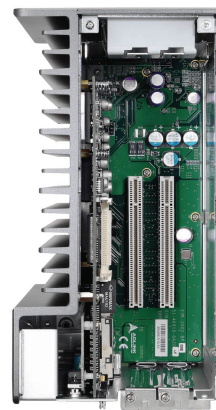


**Cable-free!  
Trouble-free!**

Inside MXC-2000 Series



Easy Installation for HDD and PCI/PCIe Cards

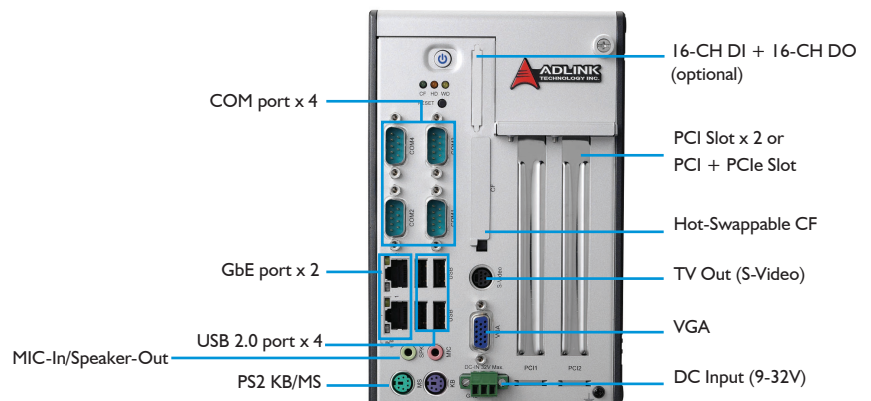

MXC-2000 Series Front Panel

## Specifications

Model Name	MXC-2002	MXC-2011
<b>System Core</b>		
■ Processor	Intel®Atom™ N270 1.6 GHz CPU	
■ Chipset	Intel® 945GSE Graphic Memory Control Hub Intel® I/O Controller Hub 7 Mobile (ICH7-M)	
■ Video	Analog CRT, Supports QXGA (2048 x 1536) Resolution TV-out, Supports S-Video and Composite Outputs	
■ Memory	1 GB DDR2 533 MHz SODIMM module	
<b>I/O Interface</b>		
■ Expansion Slots	Two PCI slots	One PCI slot and one x1 PCIe slot
■ Ethernet	2x GbE Ports (Realtek® 8111C)	
■ Serial Port	2x RS-232/422/485 (jumper selectable, COM1 & COM2) 2x RS-232 (COM3 & COM4)	
■ USB	4x USB 2.0 Ports	
■ Audio	1x Mic-in and 1x Speaker-out	
■ KB/MS	1x PS/2 Keyboard and 1x PS/2 Mouse	
■ DIO	Optional 16-CH isolated DI + 16-CH isolated DO	
<b>Power Supply</b>		
■ DC Input	Built-in 9-32 V DC Input with Over-voltage Protection 3P Pluggable Connector with Latch (GND, V-, V+)	
■ AC Input	Optional 60W external AC-DC adapter for AC input	
<b>Storage Device</b>		
■ SATA HDD	On-board SATA Port for 2.5" HDD/SSD Installation	
■ CompactFlash	2x Type II CF Sockets, Supporting PIO and DMA Modes CF1 (internal) for HDD Replacement CF2 (external) Supports Hot-swapping	
<b>Mechanical</b>		
■ Dimensions	118 mm (W) x 219 mm (D) x 183 mm (H)	
■ Weight	2.8 kg (6.16 lbs)	
■ Mounting	Wall-mount Kit	
<b>Environmental</b>		
■ Operating Temperature	Standard: -10°C to 60°C Extended: -20°C to 70°C	
■ Storage Temperature	-40°C to 85°C (excluding HDD/SSD/CF)	
■ Humidity	~95% @ 40°C (non-condensing)	
■ Vibration	Operating, 5 Grms, 5-500 Hz, 3 Axes (w/CF or SSD) Operating, 0.7 Grms, 5-500 Hz, 3 Axes (w/HDD)	
■ Shock	Operating, 50 Grms, Half-sine 11 ms duration (w/CF or SSD)	

## Ordering Information

Model Name	Description	PCI	x1 PCIe	GbE	COM	USB	Memory	DIO
MXC-2002	Intel® Atom™ N270 fanless configurable controller	2	0	2	4	4	1 GB DDR2	
MXC-2002D	Intel® Atom™ N270 fanless configurable controller	2	0	2	4	4	1 GB DDR2	16 DI+16 DO
MXC-2011	Intel® Atom™ N270 fanless configurable controller	1	1	2	4	4	1 GB DDR2	
MXC-2011D	Intel® Atom™ N270 fanless configurable controller	1	1	2	4	4	1 GB DDR2	16 DI+16 DO

## Optional Accessories

2 GB DDR2 Upgrade	Upgrade to 2 GB DDR2 Memory
160 GB HDD Option	Factory-installation of 160 GB SATA Hard Disk Drive (0-50°C)
32 GB SSD Option	Factory-installation of 32 GB SATA Solid State Disk (0-70°C)
8 GB Industrial SSD Option	Factory-installation of 8 GB Industrial-grade SATA Solid State Disk (-40 to 85°C)
60 W AC Adapter	60 W Industrial-grade AC adapter (-20 to 70°C)
Extended Temperature Option*	Extend the operating temperature of the MXC-2000 series to -20 to 70°C

\*This option guarantees cold boot of the system at -20°C and operation with 100% loading at 70°C



[www.adlinktech.com](http://www.adlinktech.com)



### Headquarters

9F, No. 166, Jian-Yi Rd, Chungho City, Taipei, Taiwan

Tel: +886-2-8226-5877 Fax: +886-2-8226-5717

Email: [service@adlinktech.com](mailto:service@adlinktech.com)

ADLINK has sales offices throughout the world. If you need assistance to locate a sales office, please check on the ADLINK website.

All specifications are subject to change without further notice.

All products and company names listed are trademarks or trade name of their respective companies.