


IMB-9454G-R20

micro-ATX Motherboard with Intel® Core™2 Duo, Pentium® 4/ Pentium® D/ Celeron® D FSB 533/800/1066 MHz CPU, VGA, Dual PCIe GbE, SATA II, USB 2.0, 6 COM, & Audio

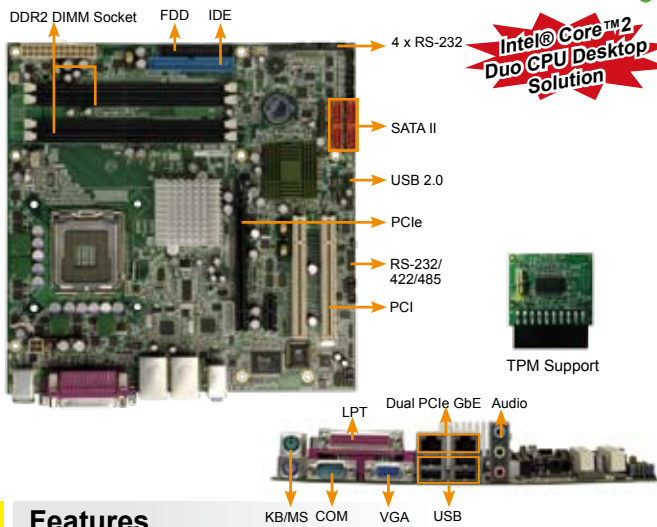

Features

1. Intel® Core™2 Duo, Pentium® 4/ Pentium® D/ Celeron® D CPU support up to FSB 533/800/1066 MHz
2. VGA integrated in Intel® 945G
3. Dual-channel DDR2 533/667MHz support up to 4GB
4. FDD, LPT, 4 x SATA II, 8 x USB 2.0 and 6 x COM

Specifications

- ◆ CPU
 - LGA 775 Intel® Core™2 Duo, Pentium® 4/ D/Celeron® D with 533/800/1066 MHz FSB
- ◆ System Chipset
 - Intel® 945G + ICH7
- ◆ BIOS
 - AMI BIOS
- ◆ System Memory
 - 4 x 240-pin Dual-channel DDR2
 - 533/667MHz up to 4GB
- ◆ Ethernet
 - Dual PCIe Broadcom BCM5787M GbE chipset with ASF2.0 support.
- ◆ I/O Interface
 - 8 x USB 2.0
 - 1 x LPT
 - 5 x RS-232, 1 x RS-232/422/485
 - 1 x 20-pin LPC for TPM
 - 2 x PS/2 for KB/MS
 - 1 x IDE
- ◆ Expansions
 - 1 x PCIe x 16 (Support PCIe x1/16 PCIe add on cards)
 - 1 x PCIe x 1
 - 2 x PCI
- ◆ Digital I/O
 - 8-bit digital I/O, 4-bit input/ 4-bit output
- ◆ Infrared Interface
 - 1x Infrared Interface by pin header
- ◆ Super I/O
 - ITE IT8712F
- ◆ Audio
 - Realtek ALC655 with AC'97 codec
- ◆ Display
 - VGA integrated in Intel® 945G
- ◆ Watchdog Timer
 - Software programmable 1-255 sec. by super I/O
- ◆ Power Supply
 - ATX power supply
- ◆ Power Consumption
 - 5V@2.09A, 12V@8.9A, 3.3V@3.6A, 5VSB@0.67A (Pentium® 4 3.2GHZ, DDR2 533 512MB*4)
- ◆ Temperature
 - Operating: 0°C ~ 60°C (32 ~ 140° F)
- ◆ Humidity
 - Operating: 5% ~ 95% non-condensing
- ◆ Dimensions
 - 244 mm x 244 mm
- ◆ Weight
 - GW: 1200 g; NW: 680 g

Packing List


1 x IMB-9454G Single board computer	
2 x Dual RS-232 Cable (P/N: 19800-000112-RS)	
1 x SATA Power Cable (P/N: 32100-088600-RS)	
1 x IDE Cable (P/N:32200-000052-RS)	
2 x SATA Cable (P/N: 32000-062800-RS)	
1 x I/O Shielding (P/N: 45014-0017C0-00-RS)	
1 x Mini Jumper Pack	
1 x Utility CD	1 x QIG

Ordering Information

Part No.	Description
IMB-9454G-R20	micro-ATX Motherboard, Core™2 Duo CPU 800/1066/1333 MHz FSB with VGA, Dual PCIe GbE, SATA II, COM and Audio
32200-000017-RS	FDD Cable
CB-USB02-RS	Dual USB Cable
CB-USB14-RS	Four USB Cable
19800-000063-RS	RS-422/485 Cable
TPM-WI01-R10	20-pin WINBOND TPM Module, S/W Management
TPM-IN01-R10	20-pin INFINEON TPM Module, S/W Management
SDVO-100VGA-R10	PCIe x16 VGA Output SDVO Card supports dual display (IEI CPU board only)
SDVO-100DVI-R10	PCIe x16 DVI Output SDVO Card supports dual display (IEI CPU board only)
CF-775A-RS/ CF-520-RS	CPU cooler

IMB-9452-R20

micro-ATX Motherboard with Intel® Core™2 Duo, Core® Duo/Solo 667MHz FSB CPU, VGA, Dual PCIe GbE, SATA, USB 2.0, 6 COM and Audio

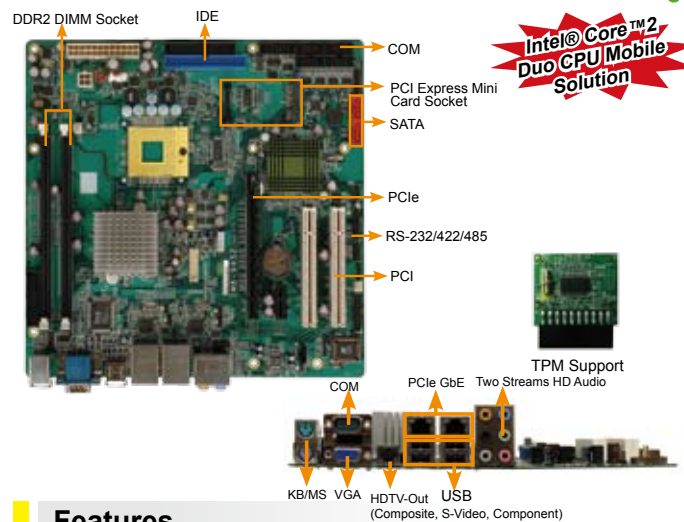

Features

1. Intel® Core™2 Duo, Core Duo/ Solo with 667 MHz FSB CPU support
2. Support 1080i HDTV-Out, Dual-channel LVDS, VGA and SDVO cards
3. Dual DDR2 400/533/667 MHz DIMM socket support up to 4GB
4. FDD, LPT, SATA, IDE, USB 2.0 and COM

Specifications

- ◆ CPU
 - Socket M Intel® Core™2 Duo, Core Duo/ Solo with 667 MHz FSB
 - Intel® Celeron M 533MHz FSB
- ◆ System Chipset
 - Intel® 945GME + ICH7-M (82801GBM/GHM)
- ◆ BIOS
 - AMI BIOS
- ◆ System Memory
 - 2 x 240-pin dual-channel DDR2 400/533/667 MHz up to 4GB
- ◆ Ethernet
 - Dual Broadcom BCM5787M GbE Chipset (LAN1 with ASF2.0 remote control support)
- ◆ I/O Interface
 - 6 x USB 2.0
 - 1 x RS-232/422/485
 - 1 x FDD
 - 2 x SATA
 - 1 x Infrared Interface
- ◆ Expansions
 - 1 x PCIe x16 (Support PCIe x1/16 PCIe add on cards)
 - 1 x PCIe x1
 - 1 x PCI Express Mini Card socket
 - 2 x PCI
- ◆ Digital I/O
 - 8-bit digital I/O, 4-bit input/ 4-bit output
- ◆ Super I/O
 - ITE IT8712F
- ◆ HD Audio
 - Realtek ALC883 HD Audio codec with 2 streams audio support
- ◆ Display Interface
 - VGA Integrated in Intel® 945GME
 - Support HDTV resolution up to 1080i by component interface
 - 24-bit dual-channel LVDS
- ◆ Watchdog Timer
 - Software programmable 1-255 sec. by super I/O
- ◆ Power Supply
 - AT/ATX support
- ◆ Power Consumption
 - 5V@1.52A, 12V@1.76A, 3.3V@3.04A, 5VSB@0.32A (Core® Duo 2.16GHZ, DDR2 1GB*2)
- ◆ Temperature
 - Operating: 0°C ~ 60°C (32 ~ 140° F)
- ◆ Humidity
 - Operating: 5% ~ 95% non-condensing
- ◆ Dimensions
 - 244 mm x 244 mm
- ◆ Weight
 - GW: 1200 g; NW: 700 g

Packing List

1 x IMB-9452 Single board computer	
2 x Dual RS-232 Cable (P/N: 19800-000113-RS)	
1 x IDE Cable (P/N: 32200-000052-RS)	
1 x SATA Power Cable (P/N: 32100-088600-RS)	
2 x SATA Cable (P/N: 32000-062800-RS)	
1 x HDTV out cable (P/N: 32000-083100-RS)	
1 x I/O Shielding (P/N: 45002-4520C0-00-RS)	
1 x Mini Jumper Pack	
1 x Utility CD	1 x QIG

Ordering Information

Part No.	Description
IMB-9452-R20	micro-ATX Motherboard with Intel® Core Duo/Core Solo 667MHz Processor, LVDS/TV, Dual PCIe GbE, SATA and Audio
19800-000063-RS	Single RS-422/485 Cable
32200-000017-RS	FDD Cable
CB-USB02-RS	Dual USB Cable
CB-USB14-RS	Four USB Cable
TPM-WI01-R10	20-pin WINBOND TPM Module, S/W Management
TPM-IN01-R10	20-pin INFINEON TPM Module, S/W Management
SDVO-100VGA-R10	PCIe x16 VGA Output SDVO Card supports dual display (IEI CPU board only)
SDVO-100DVI-R10	PCIe x16 DVI Output SDVO Card supports dual display (IEI CPU board only)
CF-479B-RS	CPU cooler

1
Industrial
Computing
Solutions

2
Embedded
Computing
Solutions

3
RISC-Based
Embedded
Solutions

4
Industrial
Data
Collector/
Server
Solutions

5
Video
Capture
Solutions

6
I/O
Communication
Solutions

7
Panel
Solutions

8
Power Supply/
Network
Communication/
Peripherals