


IMBA-XQ354


LGA 775 45nm Intel® core™2 Quad, Core™2 Duo, Celeron® CPU with a 1333/1066/800MHz FSB

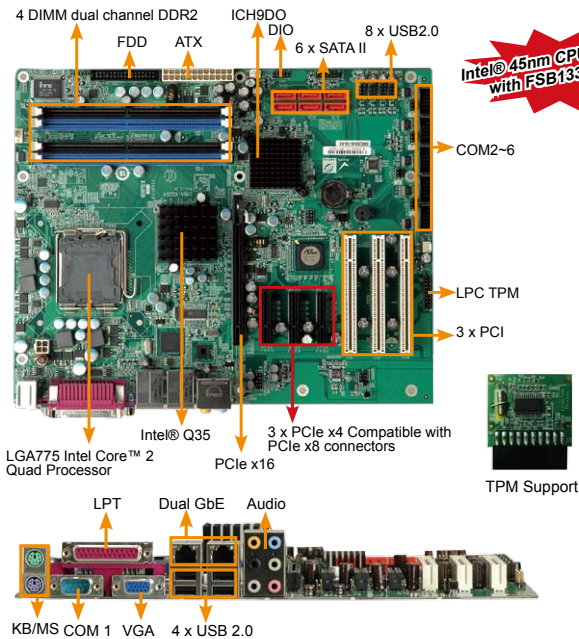

Intel® 45nm CPU support with FSB1333Mhz

IMBA-X9654

ATX Form Factor with Intel® Core™2 Quad CPU FSB 533/800/1066 MHz, VGA, Dual-channel DDR2, LPT, 6 x SATA II, 8 x USB 2.0 and 6 x COM

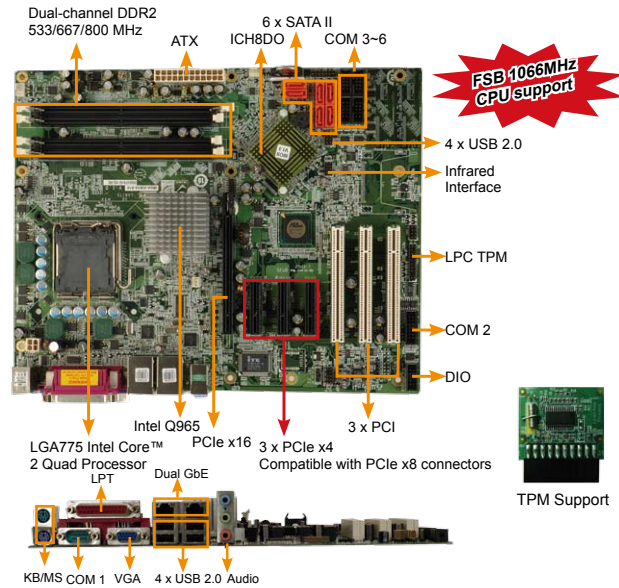

FSB 1066MHz CPU support

Features

1. ATX form factor support Intel® Q35/ICH9DO platform
2. Supports Intel® Core™2 Quad/Duo 45nm processor with 1333/1066/800 MHz FSB (FSB 1066 MHz for IMBA-X9654)
3. PLX PCIe switch for 3x PCIe x4 add on Card
4. Six SATAII with Intel Matrix storage technology supported
5. Intel® PCIe GbE with iAMT 3.0 supported
6. TPM1.2 IT security solution supported


Specifications

- ◆ CPU: LGA 775 45nm Intel® core™2 Quad, Core™2 Duo, Celeron® CPU with a 1333/1066/800 MHz FSB
- ◆ FSB: 1333/1066/800 MHz
- ◆ System Chipset: Intel® Q35, Intel® ICH9DO
- ◆ BIOS: AMI BIOS Label
- ◆ Memory: 4 x 240-pin 800/667 MHz dual-channel DDR2 SDRAM DIMM support up to 8 GB
- ◆ Graphic: Integrated Graphics Device from Q35
- ◆ Display Output: Analog display (VGA)
- ◆ Ethernet: Intel® 82566DM (PHY) + ICH9-DO (MAC) for iAMT support, Intel® 82573L (MAC+PHY) Interface PCI-Ex1
- ◆ Super IO: ITE IT8718F
- ◆ KB/MS: 1 x KB/MS
- ◆ COM PORT: 6 x RS-232 COM Port (2 by super IO, 4 by Fintek F81216DG)
- ◆ LPT: 1 x LPT
- ◆ FDD: 1 x FDD
- ◆ USB: 12 x USB 2.0
- ◆ Audio: Realtek ALC888 HD Audio codec
- ◆ SATA: 6 x SATA II
- ◆ Digital I/O: 8-bit digital I/O 4-bit input/4-bit output
- ◆ Expansions: 1 x PCIe x 16, 3 x PCIe x 4 (by PLX PEX8518), 3 x PCI
- ◆ WDT: Software Programmable supports 1~255 sec. system reset
- ◆ TPM: Support TPM1.2
- ◆ Power Supply: ATX supported
- ◆ FAN connector: 1 x 4-pin CPU Fan and 2 x 3pin system fan
- ◆ Power Consumption: 3.3V@2.96A, 5V@6.92A, 12V@2.77A (Intel® Core™2 Duo E6850 CPU with 800 MHz 8GB DDR2 DIMM)
- ◆ Temperature: Operation: 0°C ~ 60°C (32°F ~ 140°F)
- ◆ Humidity: Operation: 5% ~ 95%, non-condensing
- ◆ Dimensions: 305 mm x 244 mm
- ◆ Weight: GW:1.2 kg, NW:0.6 kg

Packing List

1 x IMBA-XQ354 / IMBA-X9654 single board computer	
2 x Dual RS-232 cable (P/N: 19800-000113-RS)	
1 x RS232 cable (P/N: 19800-000114-RS)	
6 x SATA cable (P/N: 32000-062800-RS)	
1 x I/O shielding (45014-0025C0-00-RS for IMBA-XQ354-R10, 45014-0017C0-00-RS for IMBA-X9654-R10)	
1 x Mini jumper pack	
1 x Utility CD	1 x QIG

Three PCIe x4 expansion by switch IC solution

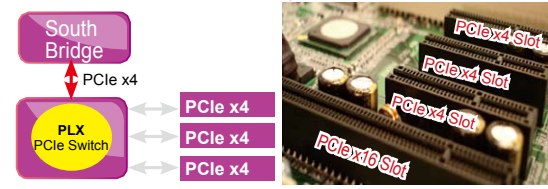

Specifications

- ◆ CPU: LGA 775 Intel® Core™2 Quad/Duo, Pentium® D/4, and Celeron® D with 533/800/1066 MHz FSB
- ◆ System Chipset: Intel® Q965 + ICH8DO
- ◆ BIOS: AMI Flash BIOS
- ◆ System Memory: 4 x 240-pin dual-channel DDR2 533/667/800 MHz up to 8 GB
- ◆ Ethernet: Dual Broadcom BCM5787M PCIe GbE chipset with ASF 2.0 support
- ◆ I/O Interface: 5 x RS-232, 1 x RS-232/422/485, 1 x LPT, 8 x USB 2.0, 6 x SATA II with RAID 0,1,5 and 10, 2 x PS/2 for KB/MS
- ◆ Expansions: 1 x PCIe x16, 3 x PCIe x4 by PLX PEX8518, 3 x PCI
- ◆ Digital I/O: 8-bit digital I/O, 4-bit input/ 4-bit output
- ◆ Infrared Interface: 1 x Infrared Interface by pin header
- ◆ Super I/O: IT8712F
- ◆ Display Interface: VGA Integrated in Intel® Q965
- ◆ Audio: Realtek ALC883 HD audio
- ◆ SSD: N/A
- ◆ Watchdog Timer: Software programmable supports 1 ~255 sec. system reset
- ◆ Power Supply: ATX Power
- ◆ Power consumption: 5V@4.62A, 12V@9.71A, 3.3V@ 5.74A (Pentium® 4 3.73GHz/1066 MHz CPU with 1 GB DDR2 667 MHz)
- ◆ Temperature: Operating: 0°C ~ 60°C (32°F ~ 140°F)
- ◆ Humidity: Operating: 5% ~95% non-condensing
- ◆ Dimensions: 305 mm x 244 mm
- ◆ Weight: GW: 1.35 kg / NW: 0.75 kg

Ordering Information

Part No.	Description
IMBA-X9654-R10	ATX Motherboard with Intel® LGA 775, Core™2 Quad/Duo, Pentium® D/4, Celeron® D processor FSB 533/800/1066 MHz, PCIe x16, PCIe GbE, SATA II and Audio
IMBA-XQ354-R10	ATX Motherboard with Intel® LGA775, Core™2 Quad CPU, Celeron® with a 1333/1066/800 MHz FSB, PCIe x16, PCIe x4, PCIe GbE, SATAII and audio
CB-USB02-RS	Dual USB cable
CB-USB14-RS	Four USB cable
32200-000063-RS	RS-232/422/485 cable
CF-775A-RS / CF-520-RS	CPU cooler
TPM-WI01-R10	20-pin WINBOND TPM module, S/W management
TPM-IN01-R10	20-pin INFINEON TPM module, S/W management
SDVO-100VGA-R10	PCIe x16 VGA output SDVO card supports dual display (IEI CPU board only)
SDVO-100DVI-R10	PCIe x16 DVI output SDVO card supports dual display (IEI CPU board only)